


T- (604) 826-8368 | (866) 466-8252 | info@puroxi.com | www.puroxi.com

PRODUCT DETAILS | SELECTION GUIDANCE CHART – 3/8” to 3” NPT





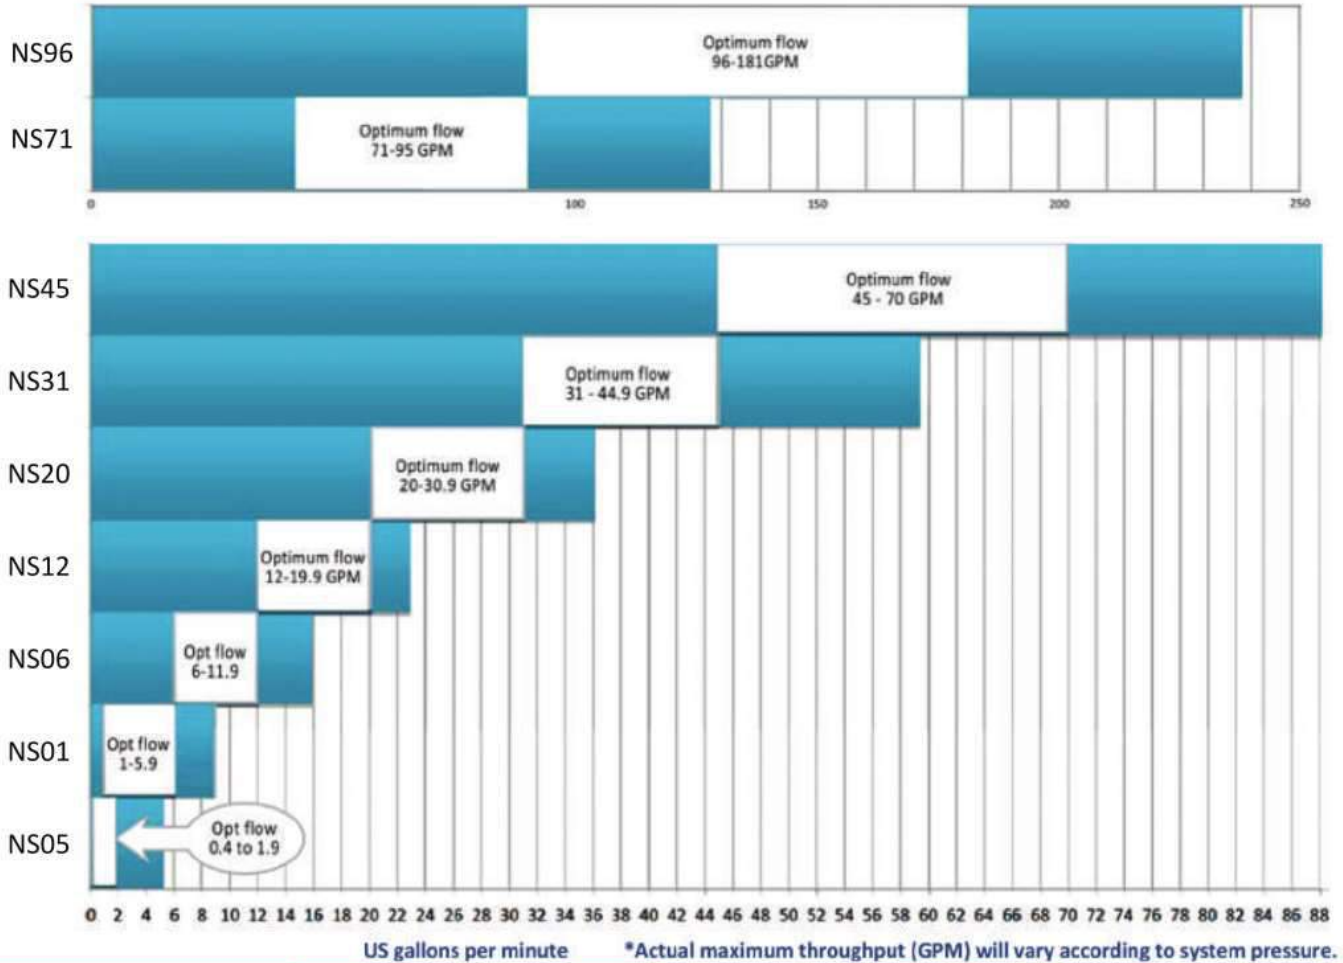


NATURALSOF	NPT	Length	Weight
NS05	3/8"	10"	.44 LBS
NS01	1"	11.5"	2.0 LBS
NS06	1"	12.625"	3.0 LBS
NS12	1"	12"	3.3 LBS
NS20	1.25"	24"	8.6 LBS
NS31	1.5"	24."	10.1 LBS
NS45	2.0"	24"	15.2 LBS
NS71	2.5"	30"	17.0 LBS
NS96	3.0"	32"	25.0 LBS

PRESSURE DROP GRAPHS – see next page ...

PRODUCT DETAILS | SELECTION GUIDANCE CHART – 3/8” to 3” NPT

Pressure Drop Graphs

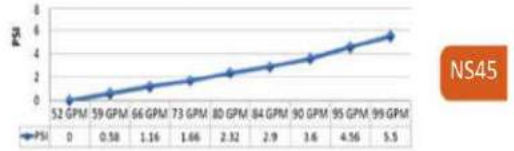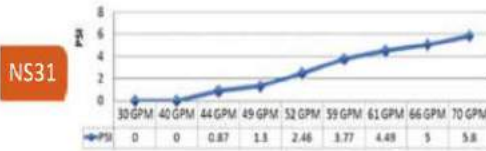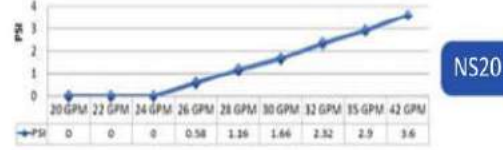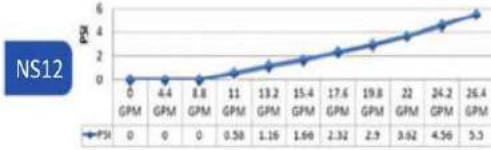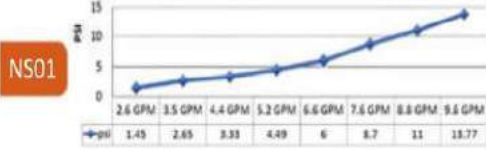

Disclaimer: Failure to consult with the company to obtain approval for installations on steam boilers and cooling towers (including evaporative condensers) will void any products warranty. No liability will be accepted for unauthorized installations on the aforementioned equipment.

Installation Options:



NPT



Quick Fit



ASA/ANSI 150 flanges

SELECTION GUIDANCE CHARTS – 2 1/2” to 12” NPT – see next page ...

Technology backed by Science ...
... Endorsed by Industry




NSF ANSI - 61 & 372



T- (604) 826-8368 | (866) 466-8252 | info@puroxi.com | www.puroxi.com

PRODUCT DETAILS | SELECTION GUIDANCE CHART – 2 ½” to 12” NPT

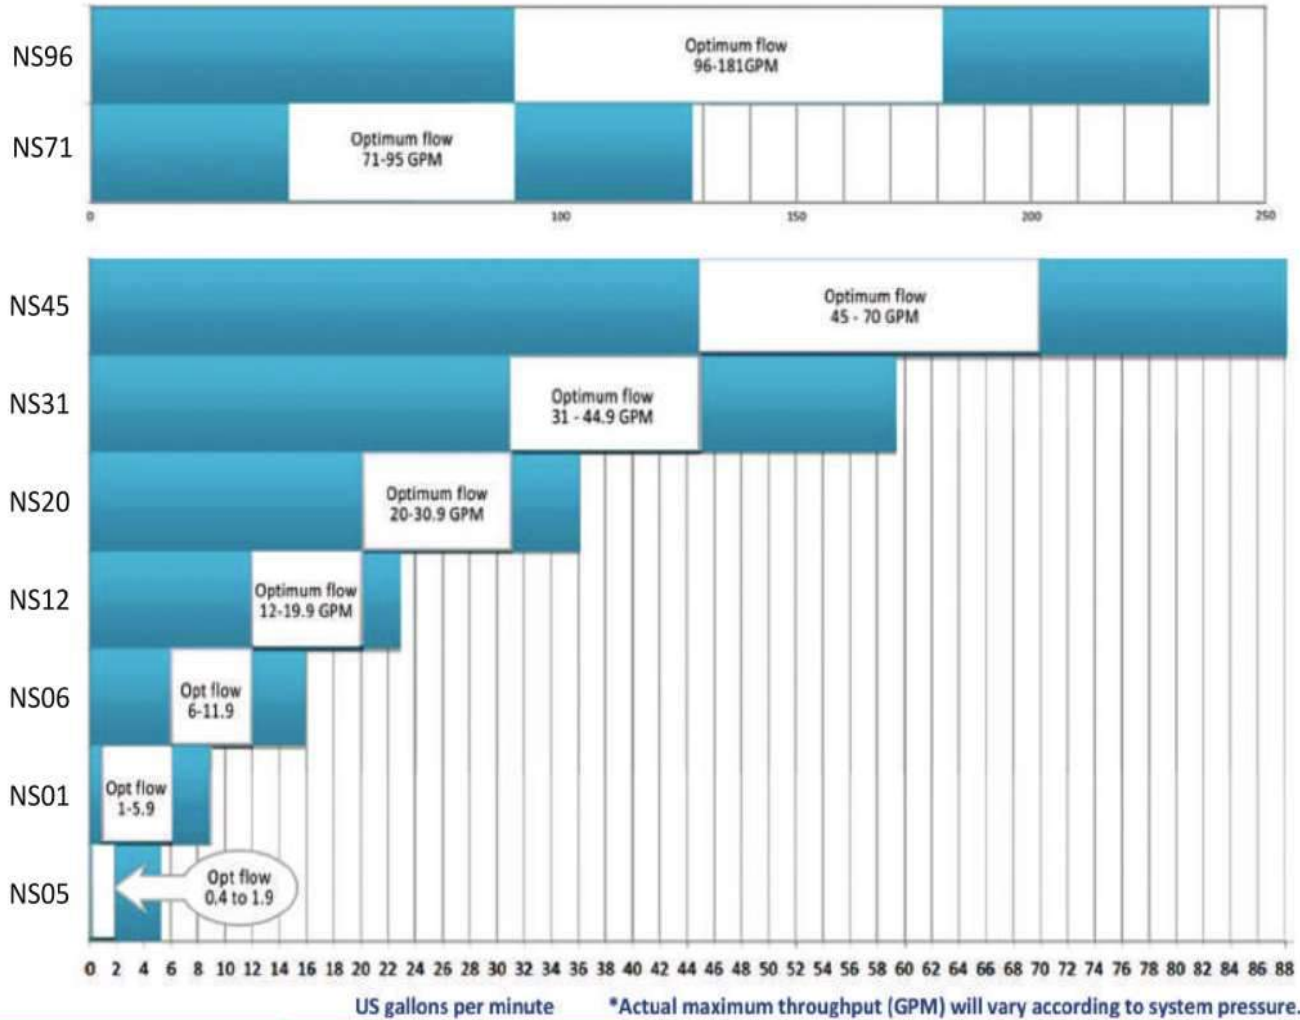

NATURALSOF	NPT	Length	Weight
NS05	3/8"	10"	.44 LBS
NS01	1"	11.5"	2.0 LBS
NS06	1"	12.625"	3.0 LBS
NS12	1"	12"	3.3 LBS
NS20	1.25"	24"	8.6 LBS
NS31	1.5"	24."	10.1 LBS
NS45	2.0"	24"	15.2 LBS
NS71	2.5"	30"	17.0 LBS
NS96	3.0"	32"	25.0 LBS

PRESSURE DROP GRAPHS – see next page ...

T- (604) 826-8368 | (866) 466-8252 | info@puroxi.com | www.puroxi.com

PRODUCT DETAILS | SELECTION GUIDANCE CHART – 2 ½” to 12” NPT

Pressure Drop Graphs

NS71



NS96



NS182



NS334



NS5483



NS927



NS1482



NS2221



Installation Options:



Quick Fit



ASA/ANSI 150 flanges

Technology backed by Science
... Endorsed by Industry



NSF ANSI - 61 & 372

